





B SERIES GEOPHONE: PS-35B

B series geophone has wide frequency band and high spurious frequency. All tolerance is controlled within 5%. The unique double coil structure considerably makes the distortion lower.

- Good stability
- High accuracy and stable signal output

Parameter/Mode	PS-35B (20°C)
Natural Frequency (Hz)	35 ± 5%
Coil Resistance (Ω)	560 ± 5%
Sensitivity (V/m/s)	32.5 ± 5%
Sensitivity With Shunt Resistor(V/m/s)	—
Damping	0.60 ± 5%
Damping With Shunt Resistor	—
Distortion (%)	≤0.2
Spurious Frequency (Hz)	≥350
Max. Motion (mm)	1
Moving Mass(g)	9.3
Dimensions (d × h)mm	26 × 32
Temperature Range (°C)	-40~+70
Warranty Period (Year)	3
Weight (g)	74.8

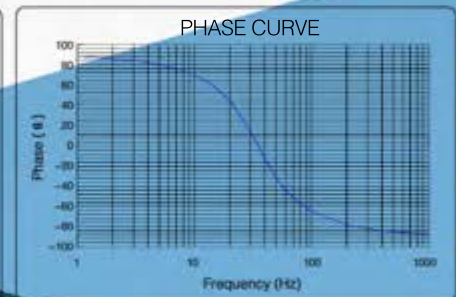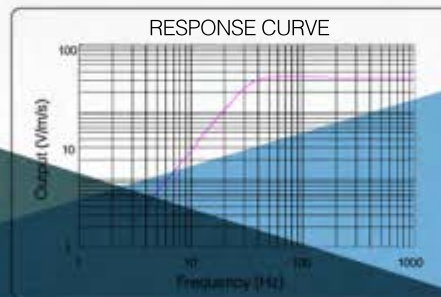

Cable & Supplies, Inc.
1115 Staffordshire Rd.
Stafford, TX 77477 USA
Tel: 281.741.2295
Fax: 281.741.2829

E-mail: Jeff.buis@csicablessupplies.com

www.csicablessupplies.com