





PS(H)-2.5

Low Frequency Geophone

PS(H)-2.5 geophone is kind of low frequency geophone developed following request of seismic exploration and engineering which is mainly to receive deep level, low frequency and weak signal. It can be used as single point and also 3-component

- Low Frequency: 2.5 Hz
- High SNR and wide dynamic range
- High Sensitivity: 270 V/m/s
- Vertical and horizontal available

Parameter/mode	PS(H)-2.5 (20°C)
Natural Frequency (Hz)	2.5 ± 15%
Coil Resistance (Ω)	6400 ± 10%
Sensitivity (V/m/s)	270 ± 15%
Damping	0.65 ± 15%
Distortion (%)	≤0.3
Spurious Frequency (Hz)	≥90
Moving Mass (g)	60
Dimensions (d × h)mm	38.5 × 46
Temperature Range (°C)	-40 ~ +80
Warranty Period(Year)	1
Weight (g)	270

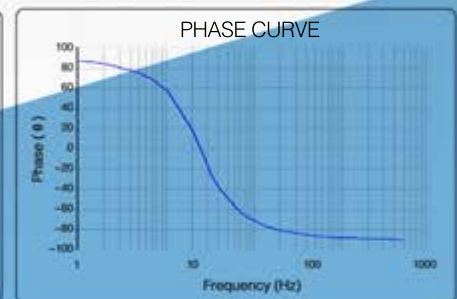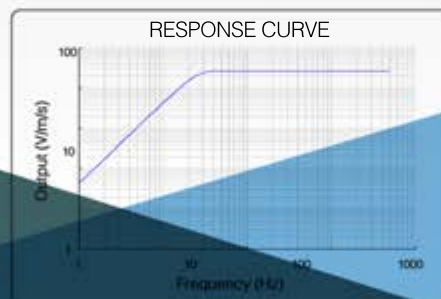

Cable & Supplies, Inc.
1115 Staffordshire Rd.
Stafford, TX 77477 USA
Tel: 281.741.2295
Fax: 281.741.2829

E-mail: Jeff.buis@csicablessupplies.com

www.csicablessupplies.com