




# SF-25

## Shallow Water Hydrophone

SF-25 has stable output and good consistency. The low impedance makes it match with various seismic acquisition system easily, and the sensitivity is stable. The molding case makes it perfect waterproofness and the strong protective cover avoids impacting damage.

Type Index	SF-25 ( 20°C )
Natural frequency ( Hz )	10 ± 10%
Sensitivity ( $\mu V / \mu \text{bar}$ )	14 ± 15%
DC Resistance ( $\Omega$ )	155 ± 10%
Insulation Resistance ( $M\Omega$ )	$\geq 100$
Maximum Operating Depth ( m )	76.2
Operating Temperature ( $^{\circ}\text{C}$ )	0 ~ 35
Polarity	SEG
Dimension (L*D,mm)	150*66
Weight(g)	600

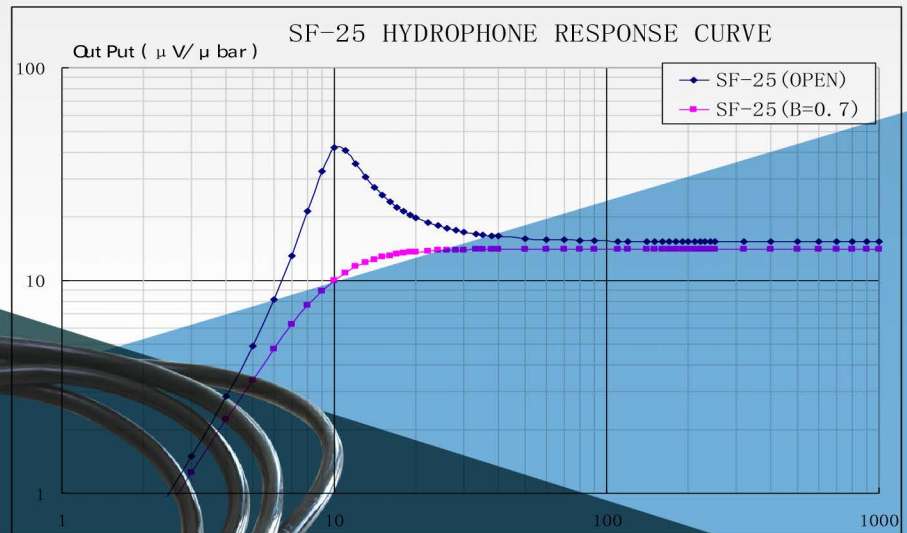

Cable & Supplies, Inc.  
 1115 Staffordshire Rd.  
 Stafford, TX 77477 USA  
 Tel: 281.741.2295  
 Fax: 281.741.2829

E-mail: [Jeff.buis@csicablessupplies.com](mailto:Jeff.buis@csicablessupplies.com)

[www.csicablessupplies.com](http://www.csicablessupplies.com)