





PSO-15RN-2400 HT

High Temperature Geophone

PSO-15RN-2400HT is a kind of specially designed high temperature geophone which has been tested at 240 degree C for over 300 hours continuously with no signs of specification deviations.

- Higher Temperature: 240 °C
- Ideal for VSP and gimbal downhole operations
- Light weight and small volume

Parameter/mode	PSO-14E-3500 (20°C)	
	Horizontal	0 ~ 360°
Normal Temperature (Hz)	15 -5%/+5%	15 -5%/+15%
Coil Resistance (Ω)	2400 ±5%	2400 ±5%
Sensitivity (V/m/s)	52 -5%/+5%	52 -15%/+5%
Damping	0.57 -15%/+15%	0.57 -20%/+15%
Distortion(%)	≤0.2	≤0.7
Max.Motion (mm)	3	
Moving Mass(g)	7.6	
Dimension (d × h)mm	22.2 × 26.5	
Temperature Range(°C)	-40 ~ +240	
Warranty Period (Year)	1	
Weight (g)	49	

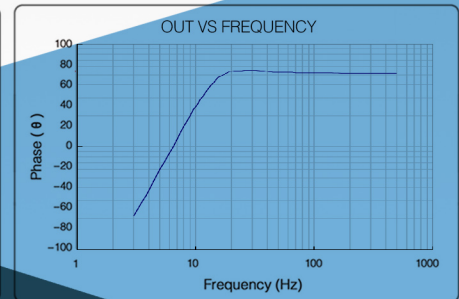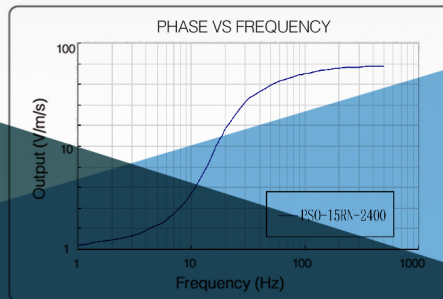

Cable & Supplies, Inc.
 1115 Staffordshire Rd.
 Stafford, TX 77477 USA
 Tel: 281.741.2295
 Fax: 281.741.2829

E-mail: Jeff.buis@csicablessupplies.com

www.csicablessupplies.com